



Product Data Sheet

Ref: P1068 Issue: B Date: April 12

UNISTRUT[®]



P1068 - ANGLE FITTING

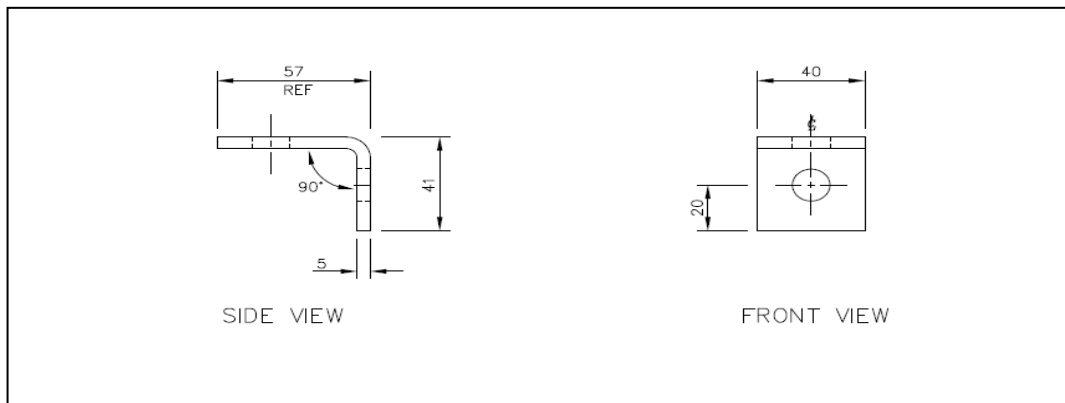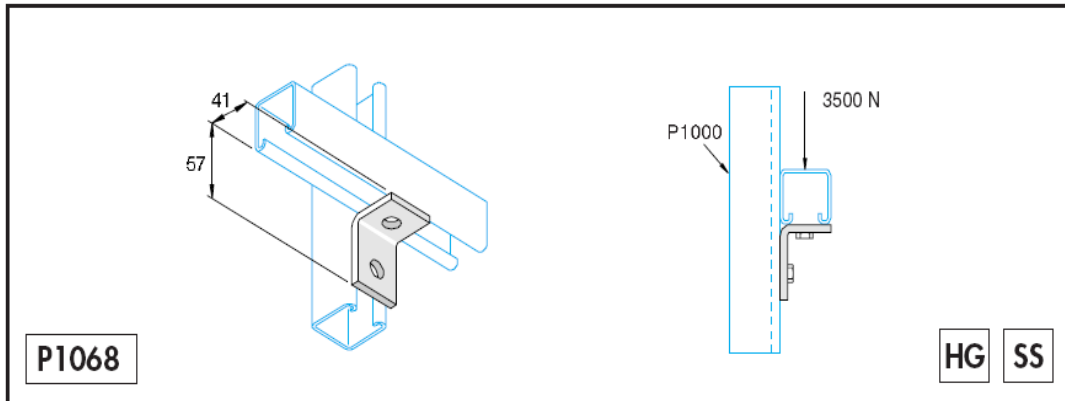

Material: Mild Steel to BS EN 10149-2-S315MC or Q345
Stainless Steel to BS EN 10088-2-1.4404+1D (S316)

Fixings:- All 14mm diameter holes use M12 grade 8.8 hex head screws with M12 BSEN 10025 S275 or Q235 channel nuts.

Application: Drawings illustrate the fitting being used with P1000.- 41mm square channel. Loading data varies due to specific application, for all queries contact Unistrut UK.

Finishes: Hot Dip Galvanised process in accordance with BS EN ISO 1461 to a mean coating thickness (minimum) of 55µm.
or
Stainless Steel - Self Colour

Part Weight:- 0.124 Kg

Box Weight: 2.48Kg

No. Per Box; 20

UNISTRUT HEALTH & SAFETY DATA SHEET REF'S :

No. 001 - PLAIN STEEL, PRE-GALVANIZED, GALVANIZED AND STAINLESS STEEL COMPONENTS

No. 099 - HOT DIP GALVANIZING (CHANNEL & COMPONENTS)

No. 102 - STEEL

