
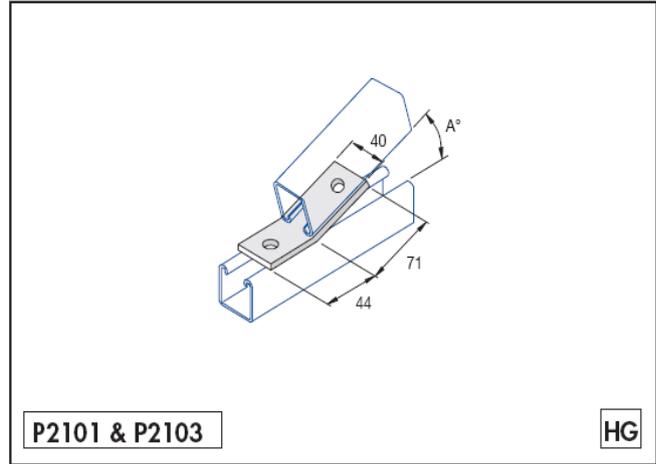



Product Data Sheet

P1546 series issue: B Date: April 2012

P1546 series- 2 HOLE ANGLE FITTINGS

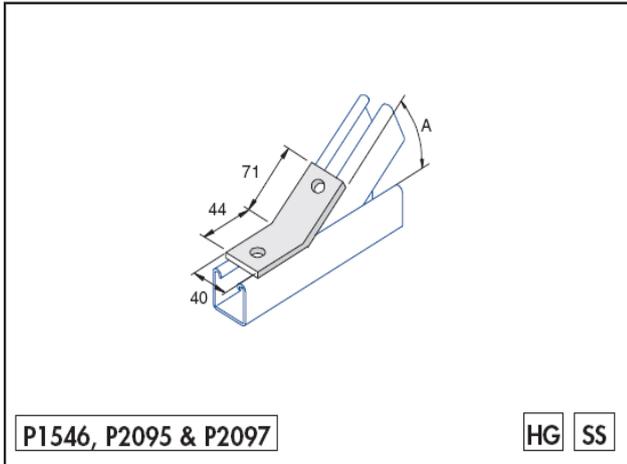

UNISTRUT PART No.	ANGLE 'X'
P2103	15°
P2101	30°
P1546	45°
P2097	60°
P2095	75°

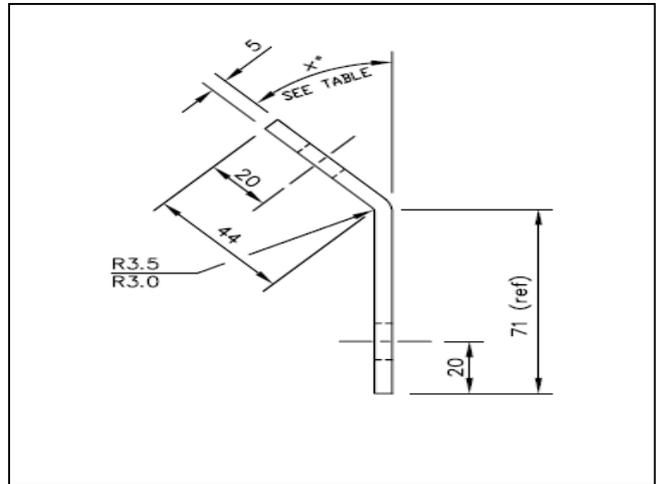

Materials:

Mild Steel to BS EN 10149-2-S315MC or Q345
 Stainless Steel to BS EN 10088-2-1.4404+1D (S316)

Fixings:-

All 14mm diameter holes use M12 grade 8.8 hex head screws with M12 BSEN 10025 S275 or Q235 Channel Nuts.

Finishes:

Hot Dip Galvanized - Process in accordance with BS EN ISO 1461 to a mean coating thickness (minimum) of 55µm.
 Stainless Steel - Self Colour

Application:-

Drawings illustrate only one application for the fitting. In many cases other applications are possible.
 The channels shown in the application are P1000,41mm square,except where otherwise noted.
 Loading data varies due to specific application, for all queries contact Unistrut UK

Part Weight: 0.168Kg

Box Weight: 1.68Kg

No. Per Box: 10

UNISTRUT HEALTH & SAFETY DATA SHEET REF'S :

- No. 001 - PLAIN STEEL, PRE-GALVANIZED, GALVANIZED AND STAINLESS STEEL COMPONENTS
- No. 099 - HOT DIP GALVANIZING (CHANNEL & COMPONENTS)
- No. 102 - STEEL

